



Specially designed for corrosive environments or applications that demand high standards of hygiene — such as food processing or pharmaceutical industries.




Technical Details		LHM200ST
Rated capacity	kg	2000
Weight	kg	70
Steering wheels	mm	Ø 175x60
Fork wheels, single/bogie	mm	Ø 85x100/Ø 85x75

Dimensions, mm		LHM200ST
x	Front axle to fork face	985
y	Wheel base	1217
h ₃	Lift height	200
h ₁₄	Height of handle in neutral pos.	1220
h ₁₃	Height of lowered fork	85
l ₂	Truck length incl. back of fork	356
b ₁	Chassis, width	520/685
s	Fork thickness	45
e	Fork width	156
l	Fork length	800/910/1000/1150/1220
b ₅	Width across fork	520/685
m ₂	Floor clearance mid wheelbase	40
A _{st}	Aisle width, min Pallet 800x1200 mm	1756
W _a	Turning radius	1392

Datas are based on l = 1150mm, nylon wheels



- All components in stainless steel or other non-corroding materials gives the truck reliability and long life.
- All surfaces are glass blasted to give a smooth surface and ensure easy cleaning.
- Welded tow bar attachment provides high reliability.
- 10/12 greasable bushings ensure a long service life.
- Also available in U-model with minimum height 75 mm.
- This product has been environmentally declared. Separate information sheet is available.

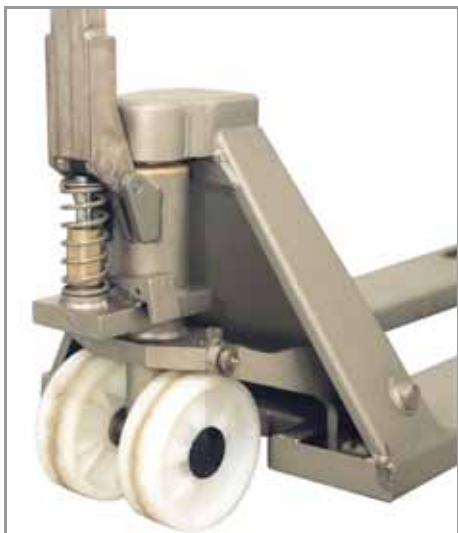

Truck features	LHM200ST
Choice of chassis widths	S
Choice of other fork lengths	S
Choice of wheel types	O
Climber wheels	S
Quick-lift version	—
Bogie fork wheels	O
Controls and instruments	
Tiller arm steering	S
Driving features	
180° steering	S
Safety features	
Handbrake	—
Parking brake	—
Maintenance features	
Lubrication points	S
Special applications	
Coldstore version	S

S = Standard feature

O = Optional feature

— = Not available

ITS, Sweden — 745100-040, 0502